

Grandioso P1X

Firmware update manual

Model covered

Grandioso P1X

Equipment used

Windows computer (with built-in USB 2.0 port)
Micro USB cable

- Cables designed only for charging cannot be used. Always use a micro USB cable that supports data transmission.

Supported operating systems

Windows 8 (32/64-bit)
Windows 8.1 (32/64-bit)
Windows 10 (32/64-bit)
(as of February, 2020)

1. Preparation

A micro USB cable is necessary to update the firmware. **Use a commercially-available micro USB cable.**

Download the DFU driver and updater to any location on the computer from the following download link.

- Double-click the downloaded files to decompress them.

<https://www.esoteric.jp/en/product/p1x/download>

DFU driver

Win_DFU_driver.exe

Updater

P1X_IFvxxx_updater.exe

IMPORTANT NOTICE

Different firmware update programs are made for every model. Execution of a firmware update program for a different model will make the Grandioso P1X unusable.

NOTE

The screens used in these instructions are from Windows 10.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Other company names and product names in this document are the trademarks or registered trademarks of their respective owners.

2. Install the DFU driver

After installing this on the computer once, installing it again will not be necessary. Proceed to "3. Update the I/F firmware."

1 Double-click Win_DFU_driver.exe.

2 When "Press any key to continue..." appears, press the Enter key.

Display example


* DFU driver for "Windows10 32bit" will be installed.

Press any key to continue...


NOTE

If a "User Account Control" pop-up message appears during installation, click "Yes".

3 When the Device Driver Installation Wizard appears, click "Next".

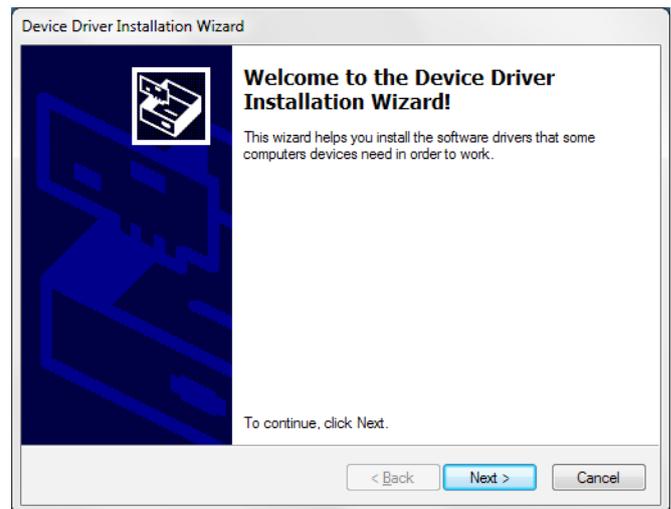

4 Click "Finish".

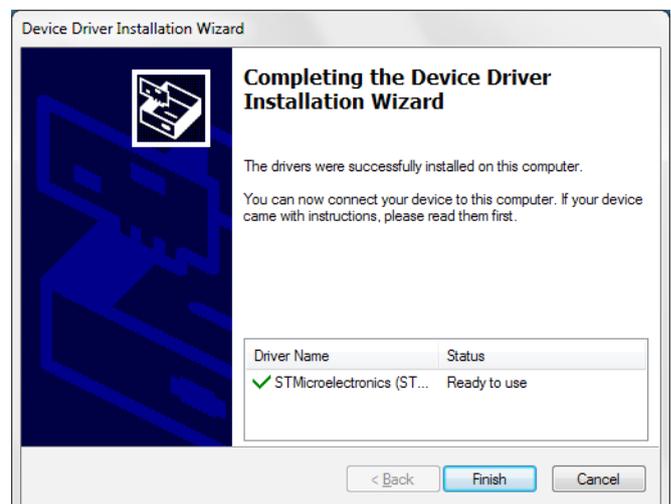


3. Update the I/F firmware

- Do this after installing the DFU driver (page 1).


1 Turn the power supply unit off.

2 Use a micro USB cable to connect the computer to the USB Micro-B SOFTWARE maintenance port on the back of the main unit.

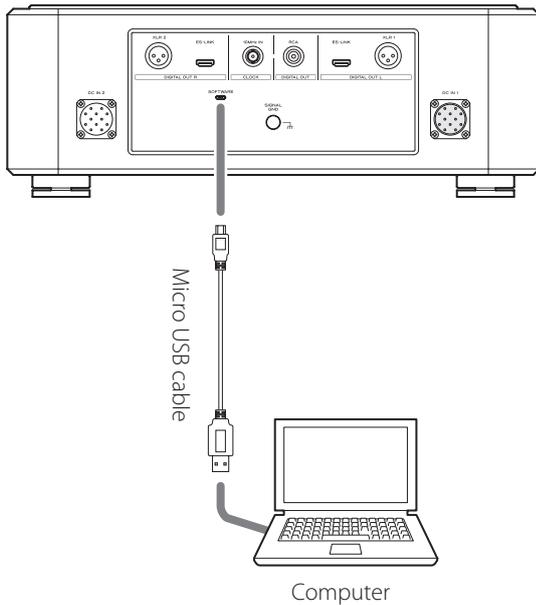

- Refer to the unit's operation manual for the location of the SOFTWARE maintenance port.
- Cables designed only for charging cannot be used. Always use a micro USB cable that supports data transmission.
- The USB driver will be installed on the computer automatically. Wait until it is complete. When first connected, loading the driver takes some time.

3 Press the POWER button on the power supply unit to turn the Grandioso P1X on.

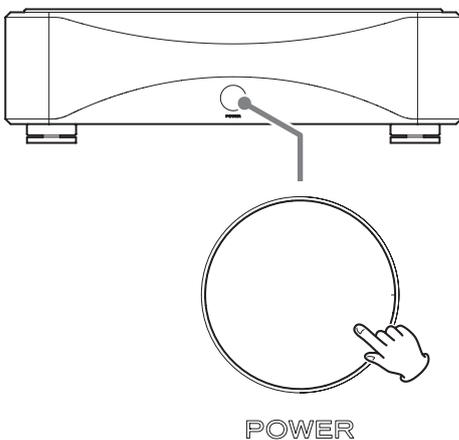

The CLOCK indicator on the unit blinks. Nothing will appear on the unit's OEL display.

4 Double-click P1X_IFvxxx_updater.exe.

```
* I/F firmware updater
P1X_IFvxxx.dfu
```

- Shut down the target unit.
- Connect the micro USB cable from PC to target.
- Push power SW of target.
Then CLOCK LED will be flashing.

Press any key to continue...

5 Confirm that "P1X_IFvxxx.dfu" is shown on the screen, and press the Enter key.

Do not turn the unit power off or disconnect the micro USB cable while updating. Doing so could make the unit not operate properly.

NOTE

The following screen will appear if the unit is not recognized by the computer. Click the x at the top right of the window to close it.

```
0 Device(s) found. Plug your DFU Device !

Target 00: Error Code: Unknown error 0x12340005.
Target: 00
Error Code: Unknown error 0x12340005.
TransferSize: 0
DFU State: (Unknown 0x75)
DFU Status: STATUS_OK
Request: (unknown 0xAC1EE8F0).
CurrentNBlock: 0x6976892C
CurrentLength: 0x76EA3C
Percent: 0
```

If the screen shown above appears, check the following items and repeat step 4.

- The DFU driver is installed (page 1).
- The Grandioso P1X is put in firmware update mode. (The Grandioso P1X is turned on by pressing the POWER button on the power supply unit.)
- The computer is connected to the USB Micro-B SOFTWARE maintenance port on the back of the main unit using a micro USB cable.

ATTENTION

- Cables designed only for charging cannot be used for firmware updates. Always use a micro USB cable that supports data transmission.
- Connecting to a different USB port on the computer might allow it to recognize the unit.
- To cancel updating when the above screen appears, disconnect the power cord of the power supply unit from the outlet once.

6 When “* Writing is completed.” appears, press the Enter key to close the window.

1 Device(s) found :
Device [1]: STM Device in DFU Mode, having [4] alternate targets
Target 00: Upgrading - Download Phase (100)...Duration: 00:00:14
Upgrade successful !

* Writing is completed.

* Please unplug the micro USB cable.

Press any key to continue...

7 Disconnect the micro USB cable from the SOFTWARE maintenance port on the back of the main unit.

This turns the Grandioso P1X off.